

PRODUCT SNAPSHOT



BULL TILES

Built to endure the toughest demands of modern athletic training, Bull Tiles are a modular 1" thick rubber flooring system engineered with an acoustical waffle back + bull-nose edge. Bull Tiles can be combined with our inlaid lifting platforms + installed by either adhering or floating with dowel connectors

BULL TILES

PRODUCT CHARACTERISTICS


| | |
|-----------|-----------------|
| SIZE | 24" x 24" |
| THICKNESS | 1" |
| STYLE | Bull-nose Edge |
| FINISH | Grippy + Smooth |

PERFORMANCE BENEFITS

| | |
|--------------------|----------|
| FORCE REDUCTION | 50.7% |
| ENERGY RESTITUTION | 53% |
| SLIP RESISTANCE | .95 SCOF |

WARRANTY

| | |
|--------------|----------|
| MATERIALS | 10 years |
| INSTALLATION | 1 year |

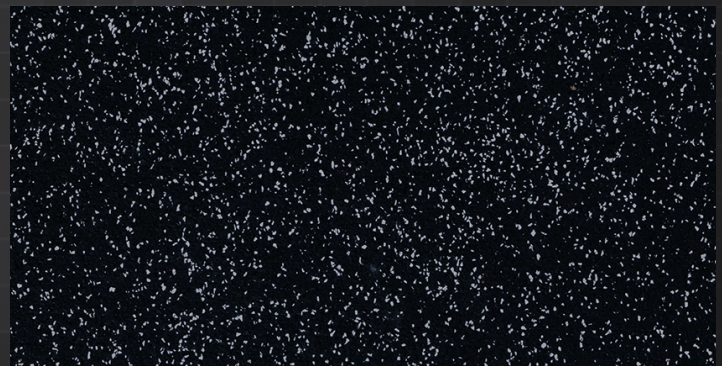

AVAILABLE
IN TILES



MADE IN
THE USA



BEST IN CLASS
WARRANTY

TECHNICAL SPECIFICATIONS

| PERFORMANCE | STANDARD | THICKNESS 1" 24mm |
|-------------------------|------------|------------------------|
| Tile Construction | | Factory-Laminated |
| Weight | | 18 lbs per tile |
| Tolerances | | Thickness: ± 3 mm |
| | | Width: ± 2 mm |
| Tensile Strength | ASTM D412 | > 200 PSI |
| Tear Strength | ASTM D624 | 70 pli min. |
| Elongation | ASTM D412 | > 75% |
| Hardness (Shore A) | ASTM D2240 | 65 +/- 5 |
| Coefficient of Friction | ASTM D2047 | > 0.95 |
| Critical Radiant Flux | ASTM E684 | Class II |
| Resistance to Light | ASTM F1515 | Pass |
| Resistance to Chemicals | ASTM F925 | No Change |
| Resistance to Heat | ASTM F4060 | 2.56 |

