

# PRODUCT SNAPSHOT



## MODX TILES

Create a portable fitness space with Mod X Tiles. Featuring a puzzle piece edge that requires zero tools or adhesives to connect; Mod X tiles are the ideal solution for a DIY or non-permanent space.

### MODX TILES

#### PRODUCT CHARACTERISTICS


SIZE	24" x 24"
THICKNESS	3/8"
STYLE	Puzzle Piece Edge
FINISH	Grippy + Smooth

#### PERFORMANCE BENEFITS

FORCE REDUCTION	12.9%
ENERGY RESTITUTION	84.1%
SLIP RESISTANCE	.95 SCOF

#### WARRANTY

MATERIALS	5 years
INSTALLATION	1 year

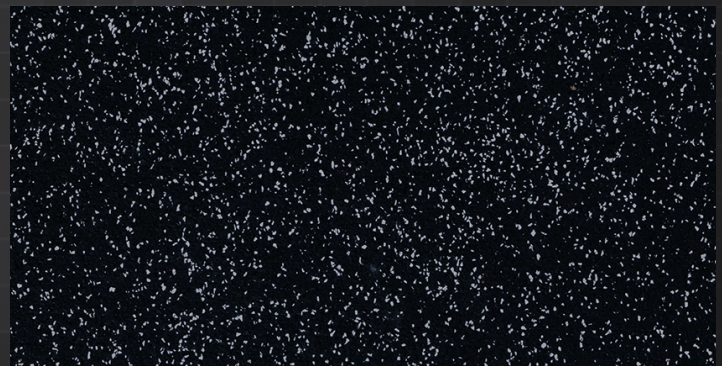

AVAILABLE  
IN TILES



MADE IN  
THE USA



BEST IN CLASS  
WARRANTY

# TECHNICAL SPECIFICATIONS

PERFORMANCE	STANDARD	THICKNESS 3/8"   9mm
Tile Construction		Single Layer
Weight		8 lbs per tile
Tolerance		Thickness: ± 3mm
Density	ASTM D3676	60 pcf - 80 pcs
Tensile Strength	D412	>200 PSI
Tear Strength	ASTM D624	70 pli min - 80 pli min
Elongation	ASTM D412	>75%
Hardness (Shore A)	ASTM D2240	60+/-5
Flexibility	ASTM F137	Pass
Coefficient of Friction	ASTM D2047	>0.95
Rolling Load	EN1569	Pass
Abrasion Resistance	ASTM D3389	<1.7g, 1000 cycles
Resistance to Impact	EN 1517	14 N/m
Resistance to Indentation	En 1516	0.1mm
Resistance to Chemicals	ASTM F925	No Change
Vertical Deformation	ASTM F2772	1.4m
Static Load Limit	ASTM F970	0.001" @ 250 psi
Pill Test	ASTM D2859	Pass
VOC Compliant	ASTM D5116	Pass