

PRODUCT SNAPSHOT



TEMPO

Combining premium performance with a timeless aesthetic, Tempo is a vulcanized rubber floor designed for multipurpose use in studios + courts. This versatile floor enables Tempo to withstand heavy loads while delivering superior comfort under foot.

TEMPO

PRODUCT CHARACTERISTICS

ROLL WIDTH 48"

ROLL LENGTH 42'l

THICKNESS 1/4" | 5/16"

FINISH Smooth

PERFORMANCE BENEFITS

HARDNESS *TOP LAYER* 75


HARDNESS *BASE LAYER* 65

SLIP RESISTANCE .80 SCOF

WARRANTY

MATERIALS 10 years

INSTALLATION 1 year

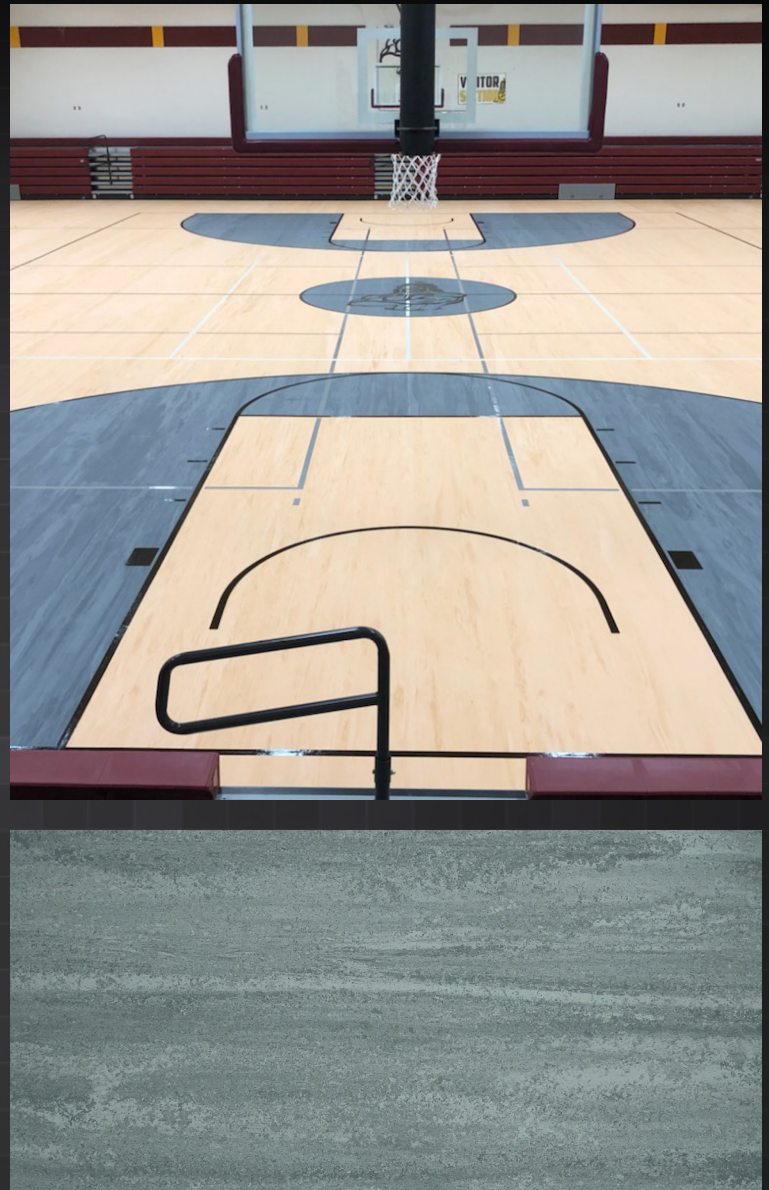

AVAILABLE
IN ROLLS



BEST IN CLASS
WARRANTY

TECHNICAL SPECIFICATIONS

PERFORMANCE	STANDARD	THICKNESS 1/4" 6mm	THICKNESS 5/16" 8mm
Roll Construction		Laminated, Dual Layer	Laminated, Dual Layer
Force Reduction	ASTM F2772	12%	Pass
Vertical Deformation	ASTM F2772	0.04mm	Pass
Slip / Skid Resistance [Dry]	ASTM F2772	104	Pass
Ball Rebound	ASTM F2772	98	Pass
Elongation at Break	ASTM D412	≥300	≥300
Tensile strength	ASTM D412	≥300	≥300
Hardness of Full Layer	ASTM D2240	68	61
Abrasion Resistance	ASTM D3389	≤0.5g	≤0.7g
Fungi Resistance	ASTM G21-15	Level 0	Level 0
Resistance of Chemicals	ASTM F925	Compliant	Compliant
Color Heat Stability	ASTM F1514	0.61	0.61
Color Light Stability	ASTM F1515	1.86	1.86
Resistance to Impact	EM1517	Compliant	Compliant
Resistance to Indentation	EN1516	0.19	Compliant
Resistance to a Rolling Load	EN1569	0.13	Compliant
Reach SVHC 191 Items	REACH	Compliant	Compliant
Greenguard Certification	Greenguard	Compliant	Compliant
Greenguard Gold	Greenguard	Compliant	Compliant

