

PRODUCT SNAPSHOT



TRAX

Prefabricated vulcanized rubber track engineered with a raised pebble embossing for ultimate elasticity + grip. Enhanced by a waffle backing creating air cells that propel athletes to their peak performance.

TRAX

PRODUCT CHARACTERISTICS



ROLL WIDTH	3'-03" to 4'-06"
ROLL LENGTH	42'l
THICKNESS	5/16" 3/8"
FINISH TEXTURE	Pebble / Granular

KEY TECHNICALS

HARDNESS <i>TOP LAYER</i>	55
HARDNESS <i>BASE LAYER</i>	45
SLIP RESISTANCE	.95 SCOF

WARRANTY

MATERIALS	5 years
INSTALLATION	1 year

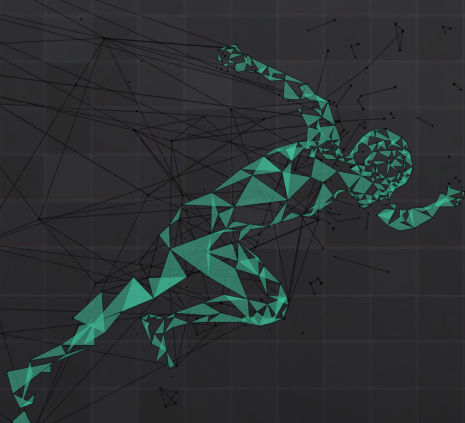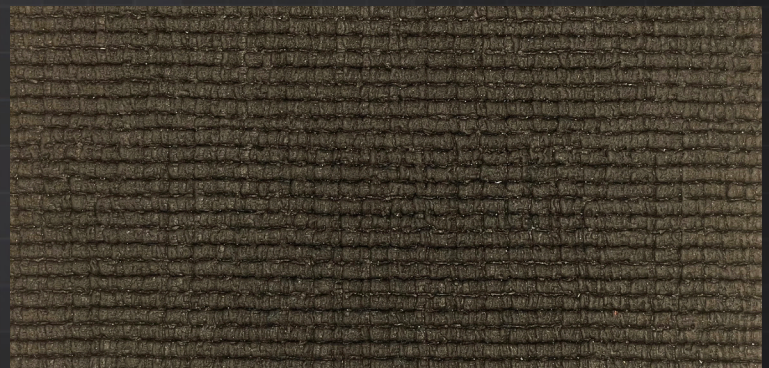

AVAILABLE
IN ROLLS



BEST IN CLASS
WARRANTY

TECHNICAL SPECIFICATIONS

PERFORMANCE	STANDARD	THICKNESS 5/16" 8mm	THICKNESS 3/8" 10mm
Roll Construction		Laminated, Dual Layer	Laminated, Dual Layer
Elongation at Break	ASTM D412	≥ 210%	≥ 210%
Tensile strength	ASTM D412	≥ 120psi	≥ 130psi
Hardness of Wear Layer	ASTM D2240	43	43
Hardness of Backing	ASTM D2240	29	29
Abrasion Resistance	ASTM D3389	≤1.2g	≤1.2g
Resistance of Chemicals	ASTM F925	No Change	No Change
Color Heat Stability	ASTM F1514	0.61	0.61
Color Light Stability	ASTM F1515	1.74	1.74
Shock Absorption	IAAF [EN14808]	29[±3]	30
Vertical Deformation	IAAF [EN14809]	1.4[±0.3]	2.0[±0.3]
Friction [Dry]	IAAF [EN13036-4]	≥100	≥100
Friction [Wet]	IAAF [EN13036-4]	≥43	≥43
REACH SVHC 191 Items	REACH	Compliant	Compliant
Sum of 18 PAHs	AF PS GS 2014:14	Not Detected	Not Detected
Critical Radian Flux	ASTM E648	Compliant	Compliant
Greenguard Certification	Greenguard	Compliant	Compliant
Greenguard Gold	Greenguard	Compliant	Compliant

