

PRODUCT SNAPSHOT



VULCAN

Distinctive design with premium performance. Vulcan is offered in a unique anti-slip, leather surface texture engineered for max resistance to weights and wear.

VULCAN TILES

TILE CHARACTERISTICS


SIZE	24" x 24"
THICKNESS	1/4" 3/8"
STYLE	Straight Edge
FINISH	Leather Embossed

PERFORMANCE BENEFITS

HARDNESS <i>TOP LAYER</i>	85
HARDNESS <i>BASE LAYER</i>	70
SLIP RESISTANCE	.85 SCOF

WARRANTY

MATERIALS	6 years
INSTALLATION	1 year

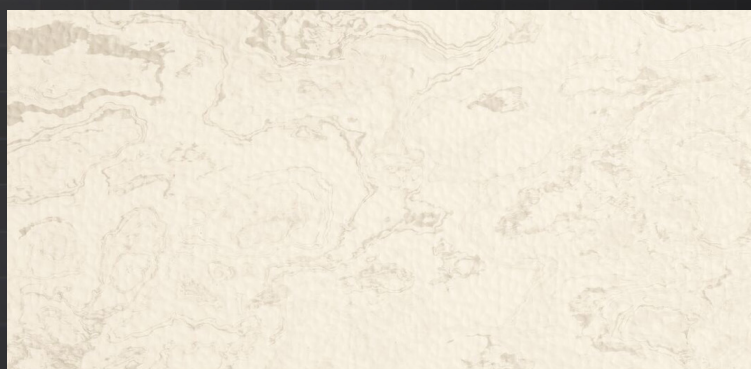

AVAILABLE
IN TILES



MADE IN
THE USA



BEST IN CLASS
WARRANTY

TECHNICAL SPECIFICATIONS

PERFORMANCE	STANDARD	THICKNESS 1/4" 6mm	THICKNESS 3/8" 10mm
Classification	ASTM F1344	Rubber Floor Tile	Rubber Floor Tile
Installation method		Glue-Down	Glue-Down
Pattern		Marbled	Marbled
Pattern type		Allover	Allover
Format Type		Tile	Tile
Chemical Resistance	ASTM F925	Passes	Passes
Static Load Limit	ASTM F970	250 psi, $\leq 0.005"$	250 psi, $\leq 0.005"$
Heat stability	ASTM F1514	$\Delta E \leq 8.0$	$\Delta E \leq 8.0$
Slip resistance	ASTM D2047	SCOF ≥ 0.5	SCOF ≥ 0.5
Flammability	ASTM E648	Class 1 (≥ 0.45 W/cm ²)	Class 1 (≥ 0.45 W/cm ²)
Smoke Density	ASTM E662	< 450	< 450
Hardness	ASTM D2240	85 +/- 5 Shore A	76 +/- 5 Shore A
Impact sound transmission	ASTM E492	57 IIC	59 IIC

