

# PRODUCT SNAPSHOT



## REFLEX XL

High-performance flooring system engineered as a dual-layered, stacked system to maximize elite training. Reflex XL boasts the industry's thickest top layer + is manufactured with custom roll lengths to create a virtually seamless floor. Let the heavyweight drop as Reflex XL combines with Grid's inlaid lifting platforms + other flooring solutions.

### REFLEX XL

#### PRODUCT CHARACTERISTICS

ROLL WIDTH	4'
ROLL LENGTH	50'*
SYSTEM THICKNESS	1/2"   3/4"   1"
FINISH	Grippy + Smooth


#### PERFORMANCE BENEFITS

FORCE REDUCTION	43%
ENERGY RESTITUTION	56%
SLIP RESISTANCE	.95 SCOF

#### WARRANTY

MATERIALS	10 years
INSTALLATION	1 year

\* Reflex XL Rubber is available in custom roll lengths by request. Contact your Grid sales representative for more information.

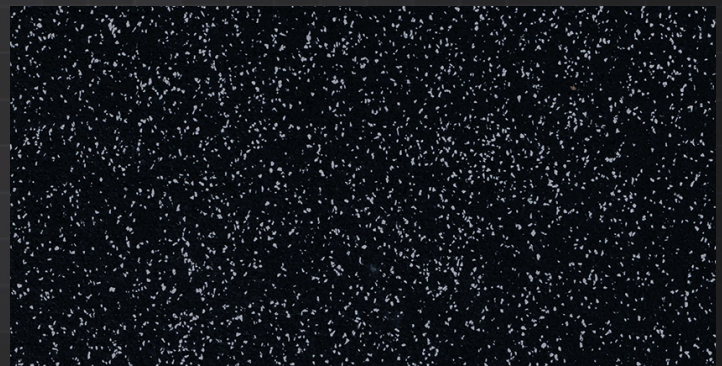

AVAILABLE  
IN ROLLS



MADE IN  
THE USA



BEST IN CLASS  
WARRANTY

# TECHNICAL SPECIFICATIONS

PERFORMANCE	STANDARD	THICKNESS 1"   24mm
Roll Construction		Field-Laminated, Dual Ply
Weight		4.7 lb per ft <sup>2</sup>
Tolerances		Thickness: ± .5mm
		Width: +1/2" - 0
Tensile Strength	ASTM D412	> 200psi
Tear Strength	ASTM D624	70 pli min
Static Load Limit	ASTM F970	0.013" @ 250psi
Hardness (Shore A)	ASTM D2240	65 +/- 5
Coefficient of Friction	ASTM D2047	> 0.95
Pill Flammability	ASTM D2859	Pass
Resistance to Light (400 hrs)	ASTM F1515	E = 6.12
Resistance to Chemicals	ASTM F925	No Change
Resistance to Heat	ASTM F1514	E = 2.56
Vertical Deformation	ASTM F2157	1.4mm

