

# PRODUCT SNAPSHOT



## REFLEX Q

Mitigate unwanted noise + vibration traveling to adjacent spaces with Reflex Q. Engineered for athletic performance as a multi-layered stacked system with 3 thickness options.

### REFLEX Q

COLOR	Iron
THICKNESS	45mm, 50mm or 70mm

#### ROLL SIZE

LENGTH	50*
WIDTH	48"


#### TECHNICALS

SOUND REDUCTION UP TO	80%
ENERGY RESTITUTION	46%
SLIP RESISTANCE	.95 scof

#### WARRANTY

MATERIALS	10 years
INSTALLATION	1 year

\* Reflex Q Rubber is available in custom roll lengths by request. Contact your Grid sales representative for more information.

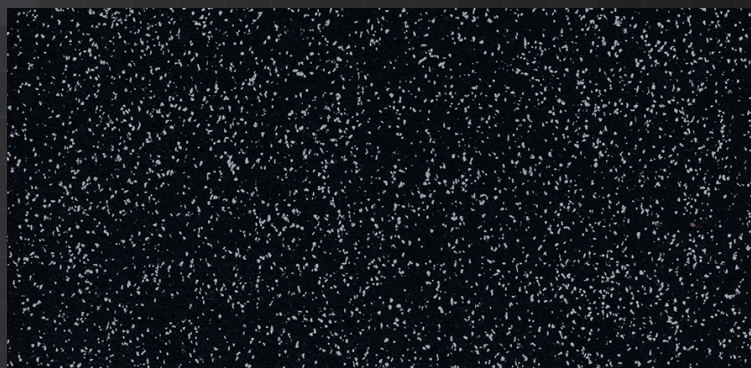

AVAILABLE  
IN ROLLS




MADE IN  
THE USA



BEST IN CLASS  
WARRANTY

# ACOUSTICAL PERFORMANCE COMPARISON

## REGRIND RUBBER

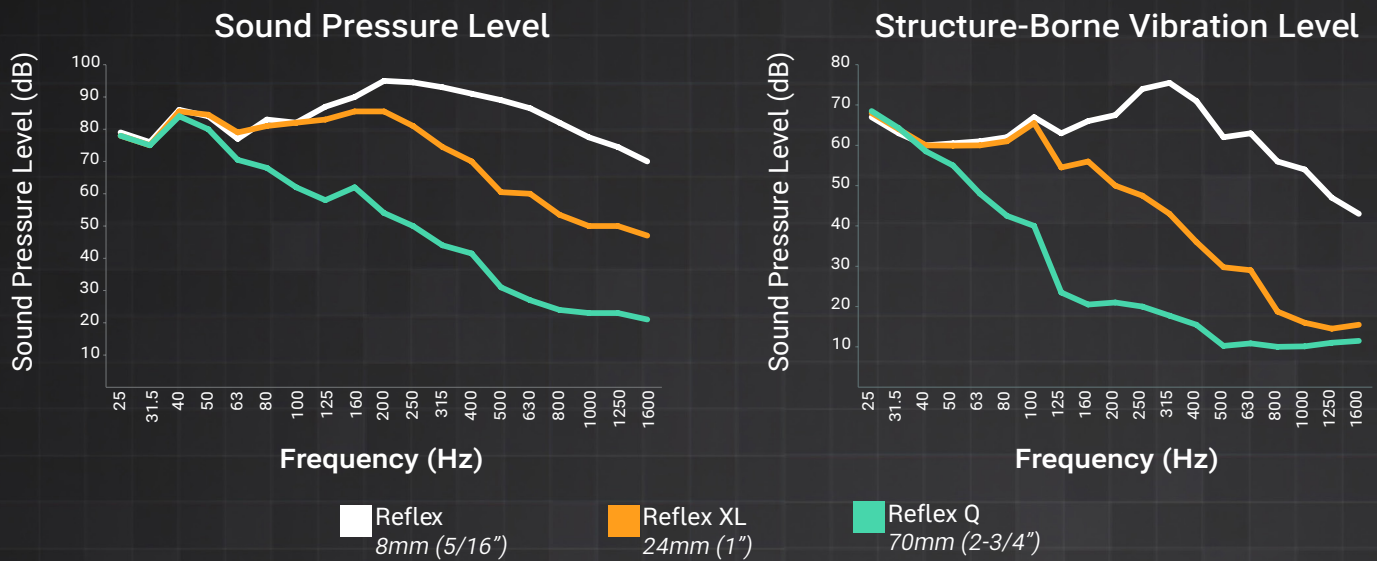

## TECHNICAL SPECIFICATIONS

PERFORMANCE	STANDARD	THICKNESS 2.75"   70mm
Roll Construction		Field-Laminated, Multi Layer
Weight		8.5 lb per sqft
Tolerances		Thickness: ± 2mm
		Width: +1/2" - 0
<b>TOP LAYER CHARACTERISTICS</b>		
Tensile Strength	ASTM D412	> 200psi
Tear Strength	ASTM D624	70 pli min
Hardness (Shore A)	ASTM D2240	65 +/- 5
Coefficient of Friction	ASTM D2047	> 0.95
Pill Flammability	ASTM D2859	Pass
Resistance to Light (400 hrs)	ASTM F1515	E = 6.12
Resistance to Chemicals	ASTM F925	No Change
Resistance to Heat	ASTM F1514	E = 2.56